

## MEASURE

Current, voltage, weld time, force and conduction angle

## KEY FEATURES

- Improved accuracy through ISO 17657 compliant toroidal coil
- Easy setup via 5.7" color touch panel
- Seam welding mode – Monitor AC current and voltage or DC voltage for up to 5 minutes
- ISO 17657 – compliant measurement for current – Requires ISO-compliant toroidal coil
- Data storage via on-board flash drive
- Ethernet (TCP/IP), and USB communication
- Multi-language support: English, Spanish, Japanese, Chinese, Korean, German and French

# MM-410A

## Handheld Resistance Weld Checker

MM-410A enables operators to monitor and manage key welding variables that result in changes in weld heat such as current, voltage, time, and force. The compact, handheld unit supports a wide range of resistance welding technologies including AC, DC inverter, AC inverter, transistor and capacitive discharge. It features a simple and intuitive user interface and color touch panel display.

## COMMON APPLICATIONS:

### PROCESS DEVELOPMENT

- Correlate waveform and numeric data with process results
- Provides detailed weld data for process optimization and validation

### PRODUCTION ENVIRONMENT

- **Reduces scrap** – Detects drifts in the weld process and alerts operators before process failure
- **Reduces frequency of destructive testing** – Welds that pass the set parameter limits indicate the process is in control
- **Independent monitoring of welding power supply** – Detects drifts in welding power supply calibration.

## ACCESSORIES (SOLD SEPARATELY)




**Toroidal coil  
MB-400M**  
(ISO 17657-compliant)



**Toroidal coil  
MB-800M**  
(ISO 17657-compliant)



**Toroidal coil  
MB-45F** (10x sensitivity)  
(conversion cable  
SK-1193305 is required)



**Force sensors**  
Top: MA-522B  
Bottom: MA-521B/MA-520B



**Current / force sensor  
MA-770A / MA-771A**  
(conversion cable  
SK-1200918 is required)



## TECHNICAL SPECIFICATIONS

MODEL		MM-410A		
Current	Range	1×Sensitivity toroidal coil: 0.100-2.000 kA / 0.30-6.00 kA / 1.00-20.00 kA / 3.0-60.0 kA / 10.0-200.0 kA 10×Sensitivity toroidal coil: 0.010-0.200 kA / 0.030-0.600 kA / 0.100-2.000 kA / 0.30-6.00 kA / 01.00-20.00 kA		
	Item	PEAK / RMS* / Arithmetic mean RMS	Accuracy ±1% Full scale	
Voltage	Range	0.30-6.00 V / 1.0-20.0 V		
	Item	PEAK / RMS* / Arithmetic mean RMS	Accuracy ±1% Full scale	
Force	Range	4.90-98.06 N (MA-520B), 49.0-980.6N (MA-521B), 245-4903 N (MA-770A), 490-9806 N (MA-522B, MA-771A)		
	Item	Mean RMS/maximum (peak) Before welding / After welding / Constant	Accuracy ±3% Full scale	
External	Input voltage / current range	-10 to +10 V / 4 to 20 mA		
	Range	±0.5 to 10 V or 4.8 to 20 mA (5% to 100% of rated setting)		
	Item	Mean RMS/maximum (peak) Before welding / After welding / Constant	Accuracy ±3% Full scale	
	Units	V / N / kgf / lbf / °C / °F / Mpa / bar / psi		
Measurement time	Current Voltage Power Resistance	AC	ms-AC CYC-AC CYC***Hz-AC LONG CYC-AC	1-5000ms 0.5-250.0CYC (50 Hz), 0.5-300.0CYC (60 Hz) 0.5-200.0CYC (M050: 50 Hz), 0.5-300.0CYC (M063: 63Hz), 0.5-2000.0CYC (M500: 500 Hz) 0.5-500.0CYC (50 Hz), 0.5-600.0CYC (60 Hz)
		DC	CYC-DC ms-DC SHORT ms-DC	0.5-100.0CYC (50 Hz), 0.5-120.0CYC (60 Hz) 1-2000 ms 0.50-300.00 ms (0.05 ms increment)
		Force external	1 to 10000 ms	Accuracy ±9 degrees
		Conduction angle	0-180 degrees	
	Power supply voltage	Single-phase 100 to 240 V (50/60 Hz) AC adapter output 9 V DC		
	External data output	USB / Ethernet (Protocol; TCP/IP)		
Languages	Japanese, English, Chinese, Korean, German, French, Spanish			
No. of schedules	127 schedules			

\*ISO17657 compliant

## WEIGHT & DIMENSIONS

Dimensions (L x W x H)	1.85 in x 8.82 in x 6.18 in (47 mm x 224 mm x 157 mm)
Weight	Approx. 1.98 lb (0.9 kg)

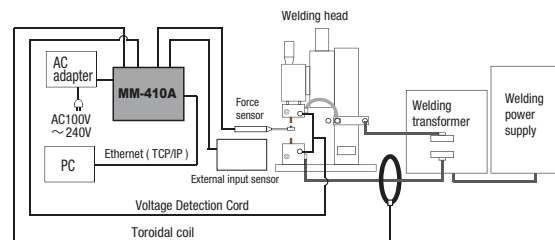

### AMADA MIYACHI AMERICA, INC.

1820 S. Myrtle Ave. • Monrovia, CA 91016 US  
T: (626) 303-5676 • F: (626) 358-8048  
info@amadamiyachi.com • www.amadamiyachi.com  
ISO 9001 Certified Company • 24/7 Repair Service: 1-866-751-7378

#### AMERICAS

**AMADA MIYACHI AMERICA (Midwest Office)**  
Detroit, Michigan  
T: (248) 313-3078  
midwestsales@amadamiyachi.com

**AMADA MIYACHI DO BRASIL LTDA.**  
São Paulo, Brasil  
T: +55-11-4193-3607  
antonio.ruiz@amadamiyachi.com

#### EUROPE

**AMADA MIYACHI EUROPE GmbH**  
Munich, Germany  
T: +49-89-839403-0  
info@amadamiyachi.com

#### ASIA

**AMADA MIYACHI CO., LTD.**  
Isehara, Japan  
T: +81-4-7125-6177  
sales@miyachi.com

**AMADA MIYACHI KOREA CO., LTD.**  
Seoul, Korea  
T: +82-31-8015-6810  
dykim@mkc.miyachi.com

**AMADA (THAILAND) CO., LTD.**  
Bangkok, Thailand  
T: +66-2170-5900  
info@mtl.miyachi.com

**AMADA MIYACHI INDIA PVT., LTD.**  
Bangalore, India  
T: +91-80-4092-1749  
info@miyachiindia.com

**AMADA MIYACHI AMERICA (Mexico Office)**  
El Paso, Texas  
T: (915) 881-8765  
mxsales@amadamiyachi.com

**AMADA MIYACHI SHANGHAI CO., LTD.**  
Shanghai, China  
T: +86-21-6448-6000  
jwu@msc.miyachi.com

**AMADA MIYACHI TAIWAN CO., LTD.**  
Taipei, Taiwan  
T: +886-2-2585-0161

**AMADA VIETNAM CO., LTD.**  
Ha Noi, Vietnam  
T: +84-4-6261-4583

Specifications subject to change without notice. Copyright© 2019 AMADA MIYACHI AMERICA, INC. The material contained herein cannot be reproduced or used in any other way without the express written permission of AMADA MIYACHI AMERICA, INC. All rights reserved.



follow us on: